


HDMI M/F RIGHT ANGLE (270°) ADAPTER

SKUS VA-HMHFL

FEATURES

- 270° HDMI Type A Female to HDMI Type A Male Right Angle Adapter 1.09" x 0.64" x 0.78"
- HDMI port saver for strain relief, preventing wear and tear on the HDMI port of your devices
- Vertical 270° right angle connector points away from the beveled side of the connector
- Provides exact angles for your applications, preventing bending of non-reversible HDMI cables
- Gold-plated connectors provide superior transmission, high reliability and durability
- All relevant materials are complied with RoHS directive

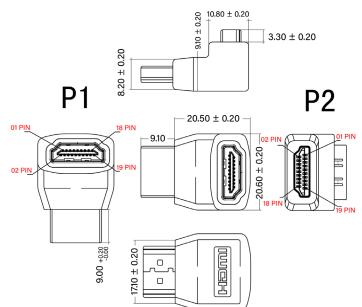

MATERIALS

(1) HDMI A/F	Terminal: C2680 semi-gold TINGG/F; Shell: C2680/SPCC, full gold/nickel; Rubber core: LCP; with half sheath
(2) HDMI A/M	Terminal: C5191 semi-gold TING/F; Shell: C2680/SPCC, full gold/nickel; Rubber core: LCP
(3) INTERNAL MODEL	High density PE
(4) EXTERNAL MODEL	45P black PVC
(5) PCB BOARD	ZS-12-P-019A





AVAILABLE COLOUR



Wiring diagram

<u>P1</u>	<u>P2</u>	<u>P1</u>	<u>P2</u>
1	1	11 ———	11
2	2	12 ———	12
3	3	13 ———	13
4	4	14 ———	14
5	5	15 ———	15
6	6	16 ———	16
7	7	17 ———	17
8 8	8	18 ———	18
9	9	19 ———	19
10	10	SHELL	SHELL

P1:HDMI A female P2:HDMI A male

SPECIFICATIONS

ROHS COMPLIANT 100% SHORT CIRCUIT BREAKING TEST		
TOLERANCE	.X ± .10 .XX ± .05 .XXX ± .03	
VOLTAGE RESISTANCE	300V DC (min.)	
CONTACT IMPEDANCE	3 ohms (max.)	
INSULATION RESISTANCE	10M ohms (min.)	

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.

www.pccableworld.com