


CAT6A SLIM UTP NETWORK PATCH CABLE (28AWG)

SKUS	C6A-S005	(0.5')	C6A-S07	(7')
	C6A-S001	(1')	C6A-S10	(10')
	C6A-S02	(2')	C6A-S15	(15')
	C6A-S03	(3')	C6A-S20	(20')
	C6A-S05	(5')	C6A-S25	(25')
	C6A-S06	(6')		

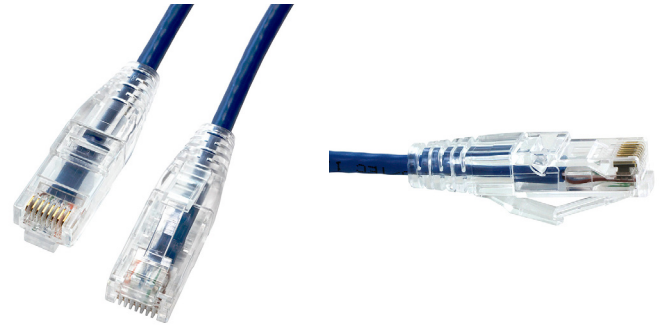


FEATURES

- 10Gb, high performance slim Cat6A 28 AWG Ethernet patch cable is designed for high density environments
- Improve airflow and cable management in tight spaces
- 60% thinner than standard 24 AWG Cat6A cables
- RJ45 connectors with 50-micron gold-plated contacts ensure clear transmission by eliminating signal loss due to corrosion
- Snag-less translucent clear boot is designed to protect the locking tab of the RJ45 connector when plugging and unplugging
- 100% bare copper wires are compliant with EIA/TIA standards by UL and ETL
- RoHS compliant

AVAILABLE COLOURS



P1	P2	T568B WIRING
1	1	WHITE/ORANGE
2	2	ORANGE
3	3	WHITE/GREEN
6	6	GREEN
4	4	BLUE
5	5	WHITE/BLUE
7	7	WHITE/BROWN
8	8	BROWN

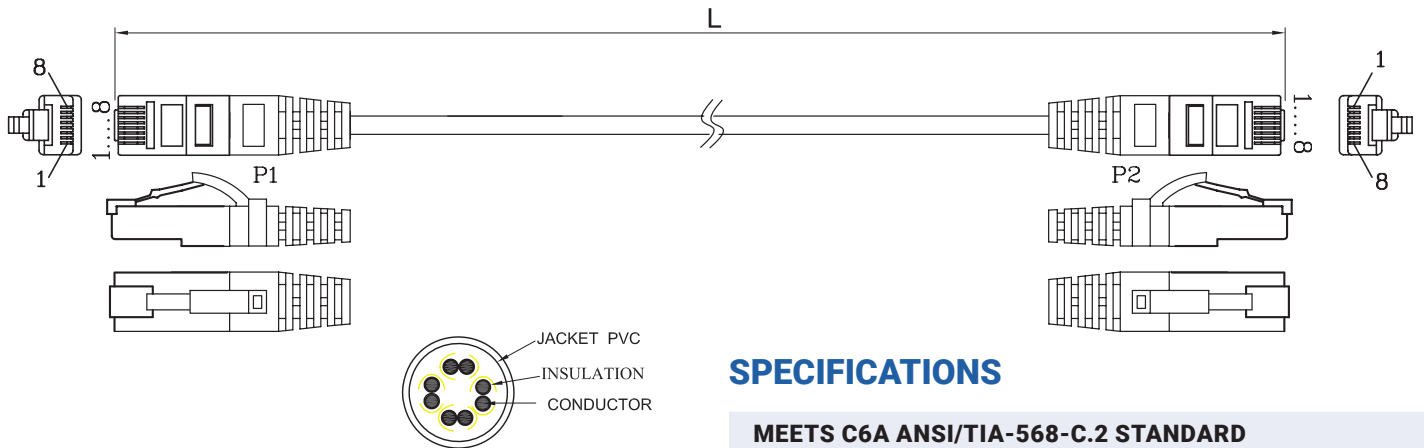

MATERIALS

JACK	8P8C Modular plug, gold plating 50 Micro-inches on contacts
CABLE	4 Twisted pairs mini Cat.6A 28AWG UTP, OD 3.6mm, Jacket PVC Fire Rating: CMR (FT4 Riser Rated)
BOOT	8P8C Transparent Boot

SPECIFICATIONS

**MEETS C6A ANSI/TIA-568-C.2 STANDARD
ROHS COMPLIANT**

CABLE LENGTH UNLESS OTHER SPEC. TOLERANCES

0 - 599mm	± 10mm
600 - 1099mm	± 20mm
1100 - 2099mm	± 30mm
2100 - 5000mm	± 40mm
> 5001mm	± 50mm

© PC Cable World. All rights reserved.

PC Cable World product specifications are subject to change without notice, but are accurate at the time of printing. Please contact a sales representative for current specs. Please note that all physical specifications are nominal.