

FACTOR
— ELECTRONICS —

V-66 PROFESSIONAL DISTRIBUTED AUDIO SYSTEM



POWER **FLEXIBILITY** SIMPLICITY



V-66 Professional

Distributed Audio System

The V-66 multiroom system offers all the features you need to make your musical experience more enjoyable. PA mode allows input one to be broadcast throughout your home. Any one of six independent sources can be played in any room simultaneously while allowing independent volume, treble, bass and balance control. The V-66 is expandable to 18 zones for large homes and commercial installations and includes six LED keypads, keypad hub, IR remote control, expansion cable and 2U professional rack kit.




It's All About Your Connections

The V-66 is designed to integrate with all your existing audio equipment and your future audio equipment too! Six independent analog sources and one high quality digital optical input provide all the connections you need.

The Freedom To Move

The V-66 provides a high quality SPDIF digital input which can be used for your high quality music server, Blu-ray player or Apple TV® to stream wireless music anywhere in your home. Connect multiple Apple Airport Express® sources and one Apple TV® source for complete freedom to stream from your smart phone, computer or tablet.

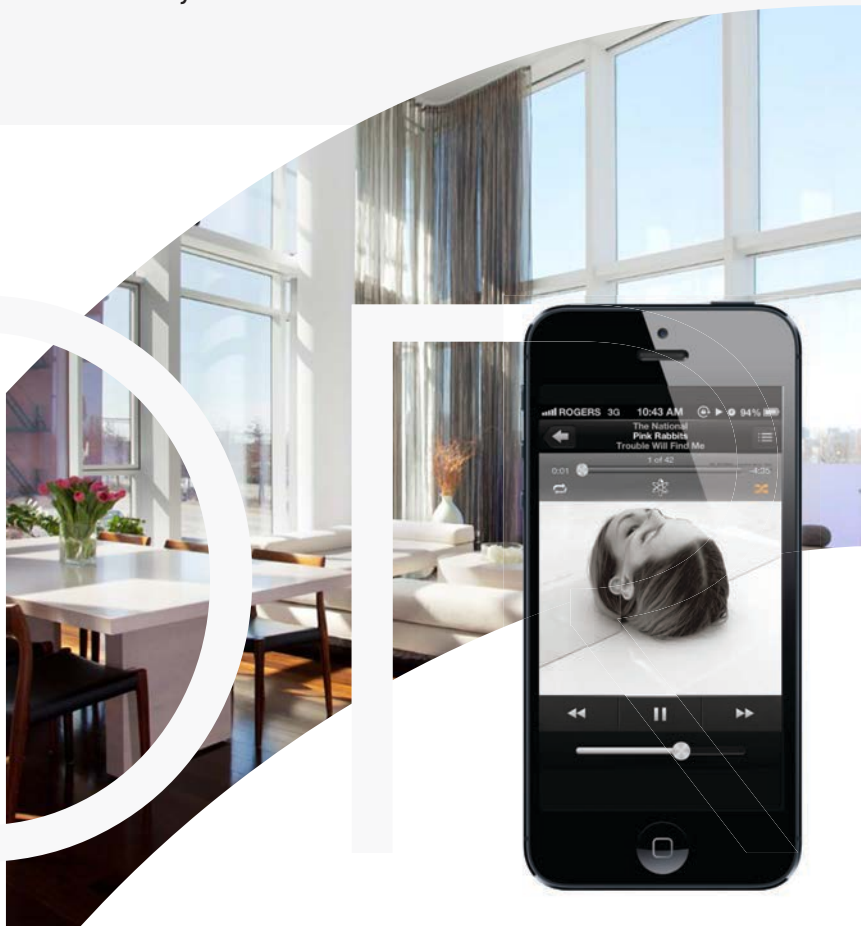

Ultimate Control

The V-66 is designed for complete integration with whole house control systems, using RS232 or Infrared control. The V-66 also provides seven 12VDC triggers and seven Infrared outputs to control theatre receivers, projectors and powered cinema screens.



Power To The People

The V-66 employs state of the art digital amplifiers and provides a massive toroidal power transformer to supply huge amounts of current where it's needed. The V-66 provides a whopping 50 watts RMS per four ohm speaker 100 watts per zone and the V-66 is capable of powering multiple speakers in larger rooms. What's more, you can bridge amplifier zones for even more power when necessary.



One Touch Complete Control

Control for the V-66 comes from the V-66 LED Keypad and V-66 remote control. No menus, no programming necessary. Simply touch a button and play your music. The V-66 LED keypad remembers all your previous settings in every zone for hassle free music enjoyment. Six white or black LED keypads are included with every V-66 kit.



SPECIFICATIONS



- Every V-66 kit includes the following: 1 x V-66 Controller Amplifier, 6 x White or Black LED Keypads, 1 x Keypad Hub, 1 x IR Remote Control, 1 x Expansion Cable, 1 x 2U rack Kit

RMS Power @ 8 ohms	25 watts x 12
RMS Power @ 4 ohms	50 watts x 12
RMS Power @ 8 ohms Bridge Mode	100 watts x 6
S/N Ratio	>85dB A Weighted
THD	<0.1%
Frequency Response	20Hz - 20kHz
Input Impedance	>47 K Ohms
Input Sensitivity	250mv
Amplifier Protection	Overload, Short Circuit & Thermal
Trigger Systems ON Voltage	DC + 12V
Trigger External Mute Voltage	DC + 12V
Infrared Frequency	38kHz
Input Connectors	3.5mm stereo, RCA, SPDIF
Output Connectors	Terminal Block, 3.5mm mono
Power Supply (switchable)	AC115V/60Hz, 230V/50Hz
Dimensions mm	430 W x 89 H x 416 D
Weight	11kg
Warranty	3 Years

All specifications are subject to change without notice.

All product and company names are trademarks™ or registered® trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.

Apple, iPod, iPod touch, iPad, iPhone, Apple TV and Apple Airport Express are registered trademarks of Apple Inc., registered in the U.S. and other countries.

V-66-WKP



V-66-BKP



V-66-HUB



V-66-RC



V-66-RACK



V-66-EXP



FACTOR
— ELECTRONICS —